

AFAWS Series

Emergency Telephone Stations and Telephone Accessories

General

These Emergency Telephone Stations provide a reliable means of communication for firefighters and other personnel.

Features

- Heavy-duty construction.
- Keylock or thumb-latch.
- Push-to-talk switch on telephone handset.
- Doors fit either recessed or surface enclosures.
- Red baked-enamel finish.
- Armored cable or standard telephone coiled cord.
- Available with or without a “break-glass” door feature.
- Master station connection LED indicator.

Applications

Stations feature a locked door design, with either a break-glass or non-break-glass feature. When a locked door is not required, an optional thumb catch allows for fast, safe entry into the housing.

The telephone handsets are available with either standard coiled cord or a durable security-type armored cable.

The hook configuration consists of two Form-C switches which permits a variety of wiring uses. The handset rests on a handsome chrome cradle which actuates the switch mechanism.

Installation

Either recessed or surface enclosures may be used with these Emergency Telephone Stations. If a recessed enclosure is used, the telephone assembly must be a model designed for recessed enclosures. The same is true of surface enclosures.

Agency Listings and Approvals

In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL:** S635
- **ULC:** CS118/CS733
- **CSFM:** 7300-0028:0193
- **MEA:** 82-98-E (AFAWS-TELA)
- **City of Chicago** approved: Class 1, Class 2
- **City of Denver** approved



AFAWS Product Line Information

The front door, backbox, and telephone assembly for AFAWS Series telephone stations must be ordered separately.

HANDSET AND HOOKSWITCH ASSEMBLIES

AFAWS-TELC: Telephone with Coiled Cord Assembly

AFAWS-TELA: Telephone, Armored Cord Assembly



Solid doors on surface-mount models with Keylock (left) and Latch (Right) closures.

TELEPHONE STATION ENCLOSURES

AFAWS-BX: Backbox
15" (381.0mm)H x 8-3/8" (212.85mm)W x 3-3/8" (85.73mm)D


AFAWS-LS: Latch Door for Surface-Mount
15-3/16" (385.60mm)H x 8-9/16" (217.45mm)W

AFAWS-LR: Latch Door for Recessed-Mount
16-3/16" (411.00mm)H x 9-9/16" (242.85mm)W

AFAWS-KS: Keylock Door for Surface-Mount
15-3/16" (385.60mm)H x 8-9/16" (217.45mm)W

AFAWS-KR: Keylock Door for Recessed-Mount
16-3/16" (411.00mm)H x 9-9/16" (242.85mm)W

BRKG-B: Breakglass Insert
Includes a tempered glass plate, a hammer attached to a chain, and a screw to attach the hammer to the trim ring.

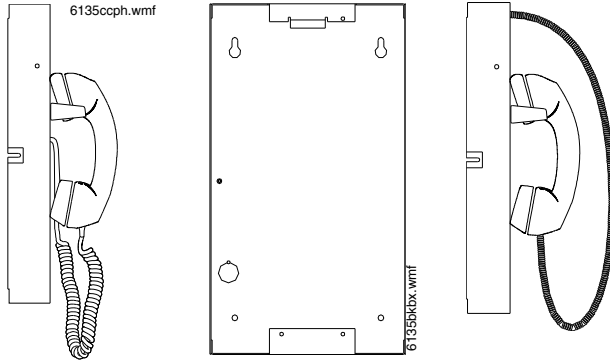

AFAWS-TELC

AFAWS-BX

AFAWS-TELA

PORTABLE FIREMAN'S TELEPHONE HANDSET

FHS: Fireman's Handset.

This handset comes with a coiled cord. The attached plug fits Fireman's Phone Jack, model FPJ, allowing firefighters to make direct communication with a central control area



TELEPHONE RECEPTACLES

FPJ: Fireman's Phone Jack

Receptacle is semi-flush mounted with a single-gang box (box is not furnished with receptacle). The receptacle has a single phone jack mounted on an attractive, single-gang, stainless steel plate. Color-coded wires, 6 inches long, are prewired to the jack to enable fast and accurate wiring to the system.



0083ph2-1.tif


EMERGENCY TELEPHONE CABINETS

FHSC-R: Storage Cabinet for 6 FHS Fireman's handsets; recessed mounting.

FHSC-S: Storage Cabinet for 6 FHS Fireman's handsets; surface mounted.

CABINET DIMENSIONS

Dimensions Pictured Below	FHSC-R Recessed Mount	FHSC-S Surface Mount
Dimension "A"	3.25" (82.6mm)	3.25" (82.6mm)
Dimension "B"	17" (432mm)	17" (432mm)
Dimension "C"	13.375 (340mm)	13.375 (340mm)
Dimension "D"	18.312 (465mm)	17.312 (440mm)
Dimension "E"	14.625 (371mm)	13.625 (346mm)



6135FHSC.wmf

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.
©2010 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.

Automation and Control Solutions

Honeywell International Inc.
1985 Douglas Drive North
Golden Valley, MN 55422
www.honeywell.com

Honeywell Limited-Honeywell Limitée
35 Dynamic Drive
Scarborough, Ontario M1V 4Z9

85-3052-1 Rev. 09-10
September 2010
Made in the U.S.A.
© U.S. Registered Trademark
© 2010 Honeywell International Inc.
Page 2 of 2

